


VL - WALL MOUNTING BRACKET

The wall mounting bracket is as standard made of S235JRG2 and dimensioned according to the static calculations. Through the hinged joints the bracket is able to compensate for the vertical expansion of the outer shell due to temperature changes. It is very important to clarify the mounting to the construction or building. The loads are led into the construction/building over the through-going bolts or anchor bolts. It is therefore important to discuss the matter with the construction-/building engineer.

The wall mounting bracket is normally hot-dip-galvanized.

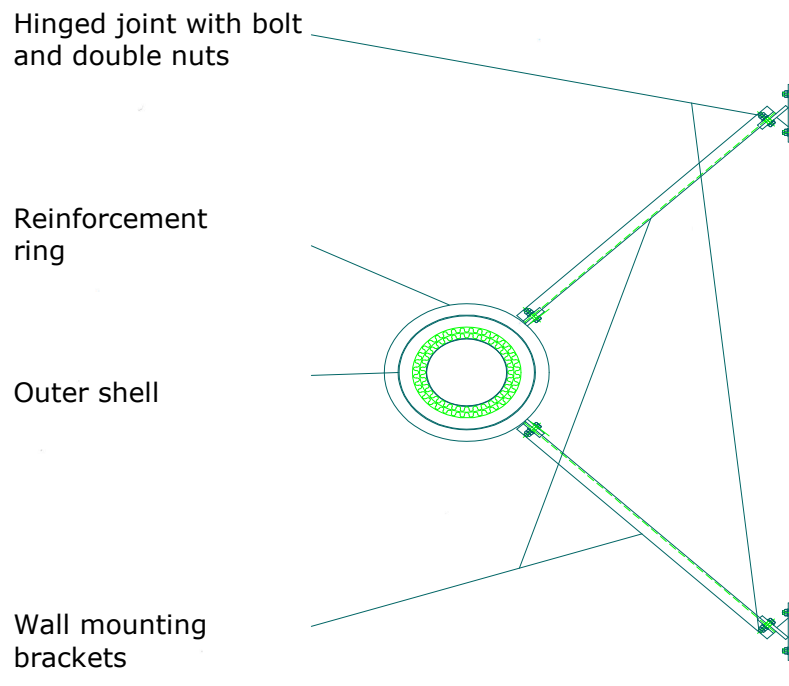

Rev. 01-08-2012